
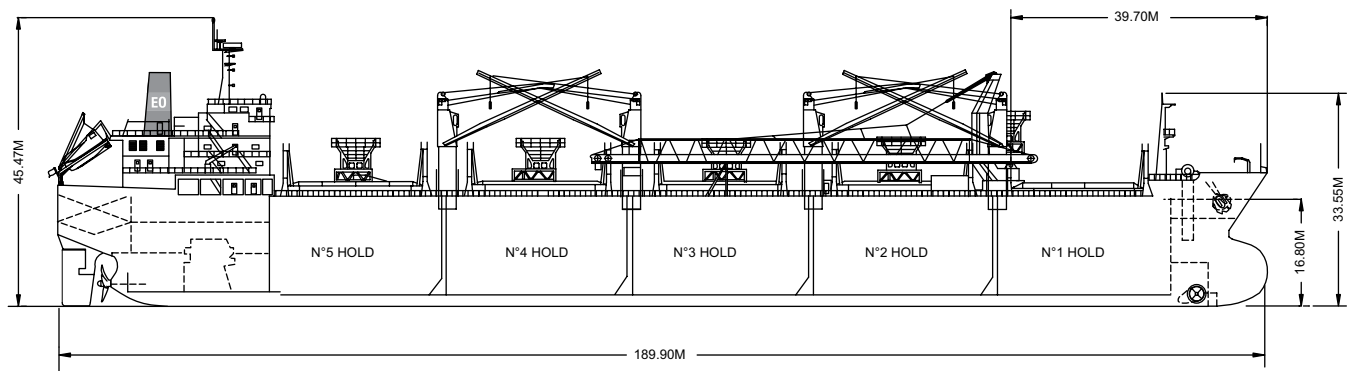
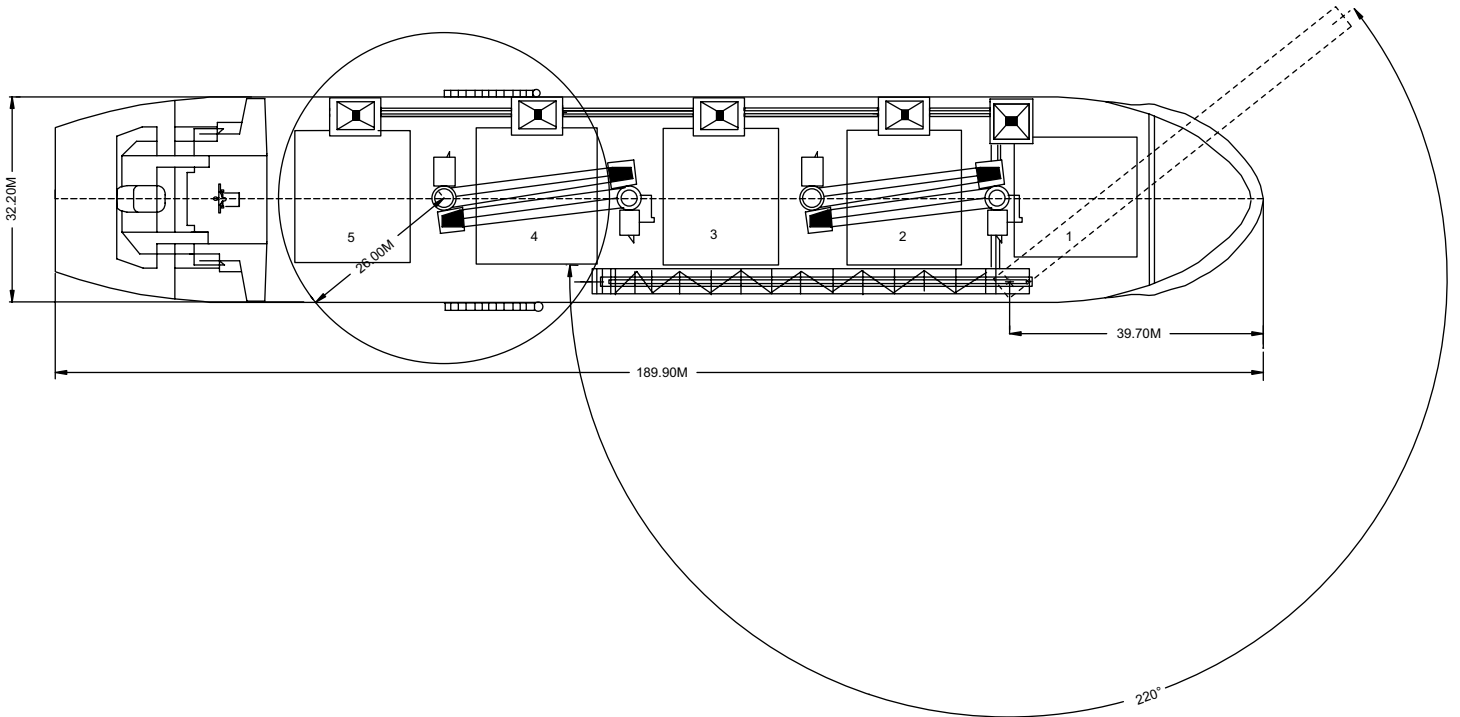


Built	2000
Classification	GL +100 A5
Length Overall	189.90 metres
Breadth Moulded	32.20 metres
Depth Moulded	16.80 metres
Total Hold Capacity (including hatches)	59,742.40 cubic metres
Deadweight	50,259.4 tonnes
Draft	12.17 metres
Gross Tonnage	28,747 tonnes
Net Tonnage	15,504 tonnes
Bow Thruster	880 kW
Length of Boom	65.60 metres
Discharge Rate	-Coal	750 tonnes/hr
	-Ore	750 tonnes/hr

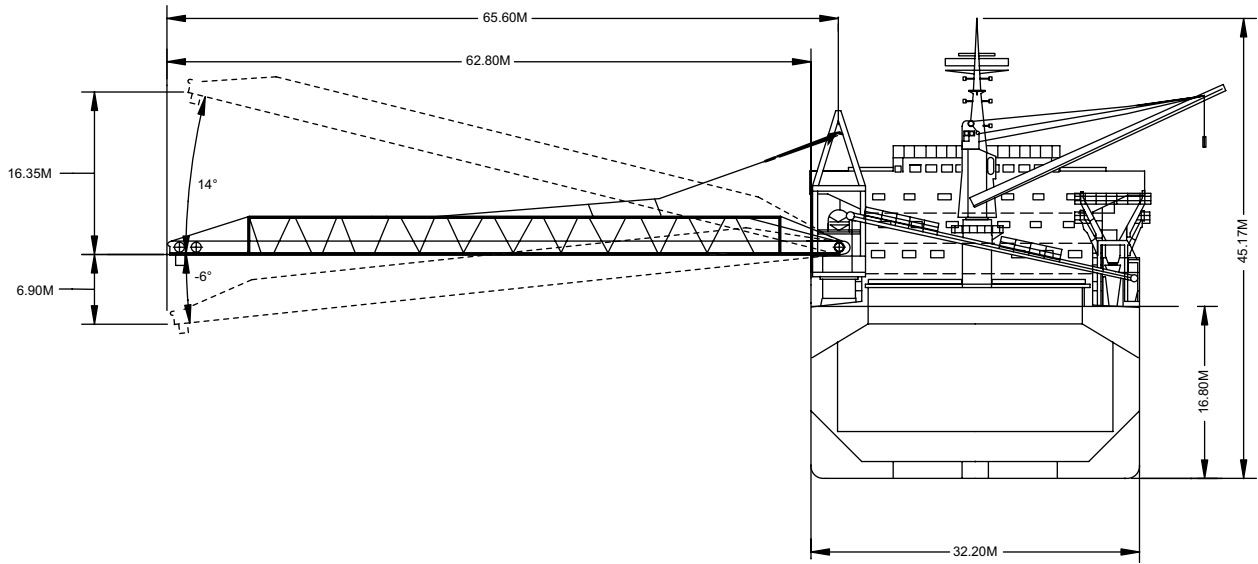

0981-04 08/19/04


Air Drafts												
<i>(metres)</i>												
Draft Condition	Stem	Foremast	Hatches			Cargo Gear	Main Mast		Funnel	Stern	Other Obstruction*	Maximum
			Forward	Midship	Aft		Deployed	Lowered				
Keel	20.90	33.55	19.33	19.33	19.33	36.06	45.47	N/A	33.8	18.50	Highest Hopper, Port Side	27.70
Light Ship	17.07	32.36	18.14	16.82	15.70	33.55	41.82	N/A	30.0	16.40	Highest Hopper, Port Side	25.30
Normal Ballast 50% Bunker	14.76	28.40	14.80	13.70	13.50	30.43	39.50	N/A	27.7	14.76	Highest Hopper, Port Side	22.60
Fully Loaded 50% Bunker	8.73	21.38	7.16	7.16	7.16	23.89	33.30	N/A	21.6	6.33	Highest Hopper, Port Side	16.40

Hatch and Hold Specifications									
Hold Number	1	2	3	4	5	6	7	TOTAL	
Hold Volumes (cubic metres)									
Cubic	10,174.3	11,983.9	11,986.2	11,986.2	11,289.7				57420.3
Maximum Grain	10,548.8	12,470.8	12,473.1	12,473.1	11,776.6				59742.4
Grain in way of Hatch	374.5	486.9	486.9	486.9	486.9				2322.1
Hold Openings (metres)									
Number of Openings	1	1	1	1	1				5
Opening Length	16.00	17.60	17.60	17.60	17.60				
Opening Width	17.60	20.80	20.80	20.80	20.80				
Coaming Height above Keel	19.30	19.30	19.30	19.30	19.30				
Hatch Information (metres)									
Description	Huahai Kvaerner	Huahai Kvaerner	Huahai Kvaerner	Huahai Kvaerner	Huahai Kvaerner				
Operation	Hydraulic Folding	Hydraulic Folding	Hydraulic Folding	Hydraulic Folding	Hydraulic Folding				
Hatch Length	16.38	17.98	17.98	17.98	17.98				
Hatch Width	8.00	21.20	21.20	21.20	21.20				
Hatch Top Height above Keel	18.70	18.70	18.70	18.70	18.70				

Cargo Handling Equipment
<ul style="list-style-type: none"> • Unloading Equipment: Krupp System with deck mounted three conveyor belts including slewing boom. Five hoppers with vibration feeders. Material passes through the hoppers onto the a longitudinal conveyor to a cross conveyor to the base of the main unloading boom.
<ul style="list-style-type: none"> • Dust Suppression System: Water Spray-
<ul style="list-style-type: none"> • Overall Length: <ul style="list-style-type: none"> • Boom Length: 65.60 metres • Max Outreach STBD side: 62.80 metres • Max Outreach PORT side: 17.94 metres
<ul style="list-style-type: none"> • Discharge Rate - Coal: 750 tonnes/hr <li style="padding-left: 20px;">Ore: 750 tonnes/hr
<ul style="list-style-type: none"> • Vessel fitted with 4 electro-hydraulic cranes with 12 cubic metre grabs

Consumption (tonnes per day)				
	Speed		Main Engine	Generators
	Loaded	Ballast	IFO	MDO
Sea	14.2 knots	14.6 knots	34.5	0
Port / Anchorage			3.5	0.1
Loading / Discharge			5.5	0.1

For more information on this ship please visit www.cslships.com

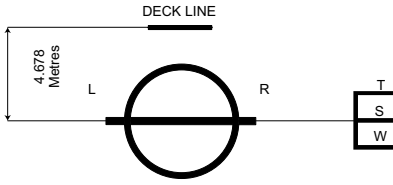

ASSIGNED DRAFTS			
Season	Draft (metre)	Displ. (tonnes)	DWT (tonnes)
T	12.4	61,685	51,496
S	12.15	60,340	50,151
W	11.89	58,925	48,736

DEADWEIGHT SCALE									
DRAFT				DISPLACEMENT (tonnes)	TPC (tonnes)	DEADWEIGHT (tonnes)	DRAFT		
Sea Water		Fresh Water					Sea Water		
(metre)	(feet)	(metre)	(feet)				(feet)	(metre)	
	42	13	42				42		
12	40		40	60,000		50,000	40		12
	38	12	38		54		38		
11	36		36				36		11
	34	11	34	50,000		40,000	34		
10	32		32				32		10
	30	10	30				30		9
9	28		28	40,000	52	30,000	28		
	26	9	26				26		8
8	24		24				24		
	22	8	22	30,000		20,000	22		7
6	20		20				20		6
	18	7	18				18		
5	16		16	20,000	50	10,000	16		5
	14	6	14				14		4
4	12		12				12		
	10	5	10	10,000			10		3
3	8		8				8		
		4							

Light Ship
10,189 tonnes

0981-04 08/19/04



For more information on this ship please visit www.cslships.com